


The First Name in Digital Audio
DENON

DVD VIDEO PLAYER

DVD-5000

Specification

Video Section		S/N
Signal System	PAL	DVD/CD 118 dB
Disc played	DVD Video Disc, Video CD, Music CD	Dynamic Range
Video Output	1 Vp-p (with 75 Ω load, sync, negative polarity)	DVD 108 dB
S-video output connector		CD 100 dB
Y output	1 Vp-p (with 75 Ω load, sync, negative polarity)	Total harmonic distortion
C output	0.3 Vp-p	DVD 0.0015 %
Component output		CD 0.0018 %
Y output	1 Vp-p (with 75 Ω load)	Sampling Frequency 32, 44.1, 48, 96 KHz
Pb output	0.7 Vp-p (with 75 Ω load)	General
Pr output	0.7 Vp-p (with 75 Ω load)	Weight 17 kg
Audio Section		Dimensions 434 (W) x 135 (H) x 374 (D) mm (excluding protruding parts)
Audio Signal output (Fixed)	2 Vrms (1 kHz, 0 dB)	Power supply AC 230 V, 50 Hz
Audio Signal output (Variable)	0 - 2 Vrms	
DVD linear audio	Frequency response: 48 kHz sampling; 2 Hz to 22 kHz 96 kHz sampling; 2 Hz to 44 kHz	
CD audio	Frequency response: 44 kHz sampling; 2 Hz to 20 kHz	

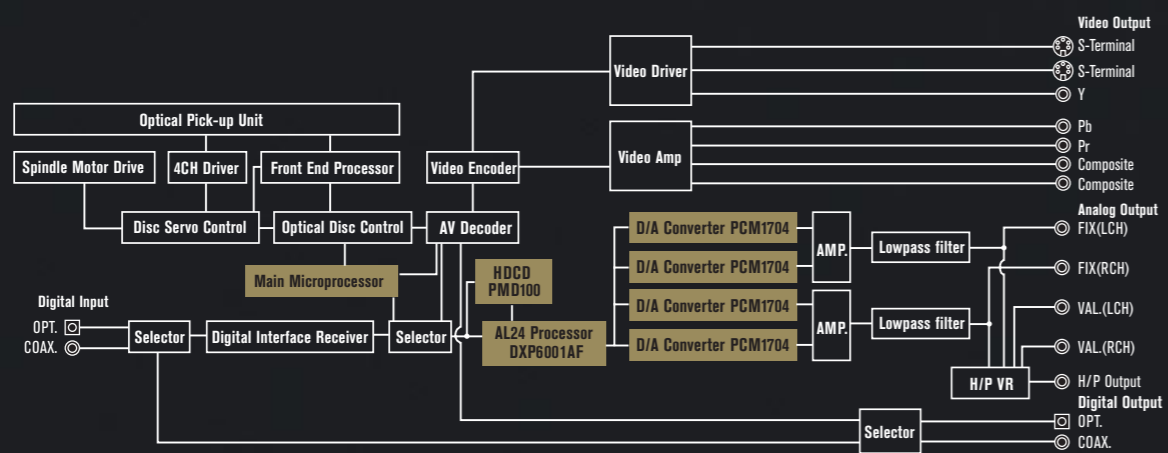

DENON



NIPPON COLUMBIA CO., LTD.
 14-14, AKASAKA 4-CHOME, MINATO-KU, TOKYO 107-8011, JAPAN
 Internet Home Page Address www.denon.co.jp

31561098

DVD-5000

State-of-the-Art DVD Player for Superior A/V Entertainment and Future Expandability

The DVD-5000 is a reference-class DVD video player featuring DENON's latest digital technology known as AL24 Processing which produces the ultimate analog waveform fidelity to suit next-generation media. In order for AL24 Processing to perform at its maximum potential, the DVD-5000 also incorporates a 4-DAC 24-bit D/A converter section which supports up to 96 kHz sampling.

With the DENON DVD-5000, the audiophile becomes enveloped in a digital sound of an order they have never experienced before. The DVD-5000 is further equipped with HDCD decoding that has been combined with DENON's digital technology to bring out the highest quality in sound that is possible with HDCD-encoded CDs.

■ Newly-developed AL24 Processing



AL24 Processing has inherited the technology of the original ALPHA Processing that was used in DENON's highly-successful S1 series of reference-class audio components. AL24 Processing further reduces quantization distortion and represents the ultimate analog waveform reproduction technology designed to support the higher numbers of bits and higher sampling rate of next-generation media.

AL24 Processing senses the nature of the digital data being input and interpolates the data so that it faithfully replicates the original analog waveform. AL24 Processing supports not only 16-bit digital data but also 18-, 20- and 24-bit data, as well as input data with a sampling frequency of up to 96 kHz.

■ Multiple 24-bit, 96-kHz D/A Converter



The DVD-5000 uses a 4-DAC 24-bit, 96-kHz Sampling D/A Converter system in order to D/A convert high-quality 24-bit data obtained from AL24



Processing with utmost fidelity. This design achieves a signal-to-noise (S/N) ratio of 118 dB and a dynamic range of 108 dB, to bring out the beautiful sound of high-bit, high-sampling technology.

■ High-speed, Precision 10-bit, 27-MHz Video D/A Converter

The highly accurate video decoder processes the DVD video data (the component luminance and color difference signals). In order to output this high-quality digital signal with its original purity still preserved, the DVD-5000 employs a high-speed, high-precision 10-bit, 27-MHz video D/A converter. This design improves the reproducibility of extremely minute details so that the picture viewed on the screen is completely faithful to the original image in both its colors and high resolution.

■ HDCD Decoder



HDCD represents encoding/decoding technology that drastically reduces digital recording distortion while retaining compatibility with the existing CD format. HDCD uses Peak Extension and Low-level Extension technology to convert 24-bit data to the 16-bit data format of existing CDs without sacrificing the high quality of 24-bit sound. This technology prevents the sound

Fig.1:AL24 Processor Block Diagram



from becoming distorted during peak periods, and boosts the low-level signals to improve the S/N ratio for a substantially richer dynamic range.

Since the DVD-5000 is equipped with an HDCD decoder, the Peak Extension and Low-level Extension features are accessed and combined with DENON's own 96-kHz, 24-bit 4-DAC system to realize the maximum potential of HDCD's remarkable sound quality.

The DVD-5000 also automatically senses the type of disc that has been loaded: an ordinary CD, a DVD disc, or an HDCD. The DVD-5000 then processes the signals based on the type of disc detected.


■ Independent D/A converter

The DVD-5000 can also be used as a D/A converter. The front panel Source switch directs the digital input signals coming in through one of the two digital input terminals (optical or coaxial) so that it passes through the unit's AL24 Processor and D/A converter for output as a clean, highly accurate analog signal.

■ Color Component Video Output

The DVD-5000 is equipped with a color component signal video output capability that faithfully outputs the analog signals resulting from direct and high-precision D/A conversion of the Y, Cb and Cr signals recorded on DVD. "S" and composite video outputs are also provided (2 of each).

■ Vibration-resistant Construction




The DVD-5000 protects the DVD and the transport mechanism from unwanted vibrations using a centrally located holder with low center of gravity firmly secured with mechanism brackets to the unit's highly rigid, copper-plated chassis. This mechanism is further isolated from the digital, video, and audio circuits which have each been mounted on their own

copper-plated board so that the circuits can be thoroughly protected from mutual interference as well as vibrations. The overall chassis of the DVD-5000 is constructed of a 15mm thick aluminum front panel, a double-layered top cover, and a quadruple-layered bottom chassis assembly. All these parts have been secured with vibration-absorbent sintered alloy insulators to produce a construction that is totally protected from both internal and external vibrations.

■ Easy-to-use Graphical User Interface (GUI)

Fig.2:How AL24 Processing Works on Audio Signals

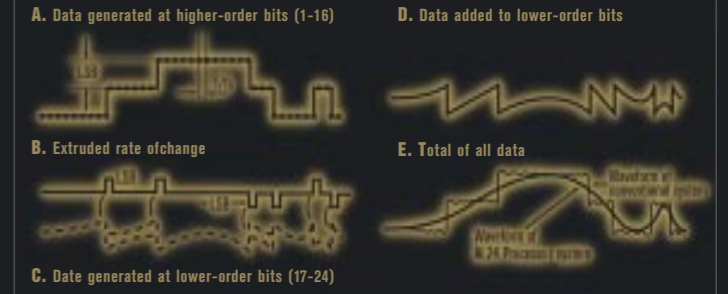

■ Parts strictly selected for sound quality

Three separate transformers have been employed for the audio, video, and control sections. Transformers specially constructed with vibration-resistant materials are used in the audio and video sections. In addition, the same strictly-selected parts whose performance has proven to be reliable during the development of DENON's



S1 series of audio components -- such as the removable ultra-thick AC power cord; very low ESR electrolytic capacitors, film capacitors and carbon resistors designed for high sound quality; and the high speed operational amplifiers selected for highest sound quality.

■ High-performance Pickup and Digital Servo Technology

In order to read the maximum of 8.5 gigabytes of data that can be recorded on one side of a DVD, the DVD-5000 uses a self-excited oscillator type red laser with a wavelength of 650 nm to ensure stable, low-noise performance. In addition, the pickup lens used with this laser employs an integral molding hologram that enables DVD and CD program sources to be read by the same pickup. As a result, the DVD-5000 features the shortest possible signal paths, a simplified construction, and superior reliability.



■ Gold plated Audio and Video Terminals

■ Digital Theater Systems (dts) Compatible Digital Output

■ Easy-to-use Remote Control With Backlit Keys

AL24 Processing


■ Expanding to Input Signal Bit Length of 24 Bits

While the original ALPHA Processing system generated four lower bits of data for the 16-bit input data to obtain data of 20-bit quality, the new AL24 Processing uses two calculating circuits in its lower data generation section to generate eight bits, to which the upper 16 bits of data is then added, producing an output signal of 24-bit quality (Figure 1).

First of all, the data reproduced from a CD is input as is in its 16-bit staircase form to the AL24 processor, as shown in waveform (a) of Fig. 2. The processor then extrudes the rate of change in 1LSB, whether positive or negative, from the portions of waveform (a) where a change in the data has occurred and produces waveform (b).

Next, the AL24 processor uses its lower-order bit data generator to produce data for the four lower-order bits, 17-24, that should normally exist below the 16 bits as shown in waveform (c). The result is waveform (d), where lower-order bit data for each 1/16 LSB point of change is generated.

Finally, the higher-order bits of waveform (a) are added to waveform (d), producing the synthesized waveform shown in waveform (e). This waveform thus reflects the smooth 24-bit over-sampled data that is reproduced with superb audio clarity.

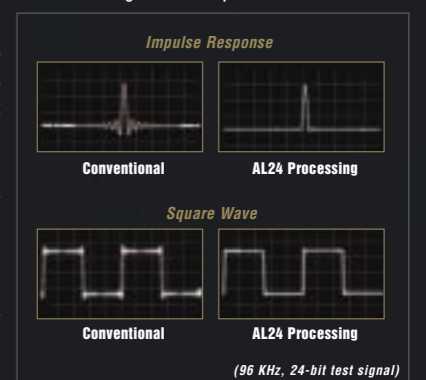

(96 KHz, 24-bit test signal)

